


28 Formage des métaux en UREFLEX®

Dévêtisseurs (DV)

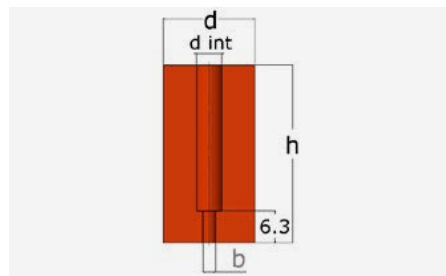

TOLÉRANCES

d, d int. ≤ 35 mm : ± 0,2 %

d, d int. > 35 mm : ± 0,6 %

h : ± 0,2 mm

d	d int.	h	Prix Unitaire	★
18	5	35		20
	5	45		20
	5	56		20
19	6	35		20
	6	45		20
	6	56		20
	6	65		20
21	8	35		20
	8	45		20
	8	56		20
	8	75		20
23	10	38		20
	10	45		20
	10	56		20
	10	65		20
26	13	35		20
	13	45		20
	13	56		20
	13	65		20
	13	75		20
30	16	35		10
	16	45		10
	16	56		10
	16	65		10
	16	75		10
38	20	38		10
	20	47		10
	20	56		10
	20	65		10
	20	75		10
50	25	38		10
	25	45		10
	25	56		10
	25	65		10
	25	75		10
63	32	56		10
65	35	56		10
80	50	56		10

Matériau	Dureté
U100	90 ShA
U167	95 ShA

★ Quantités minimum