


30 Formage des métaux en UREFLEX®

RNU ressorts normalisés UREFLEX® (RN)

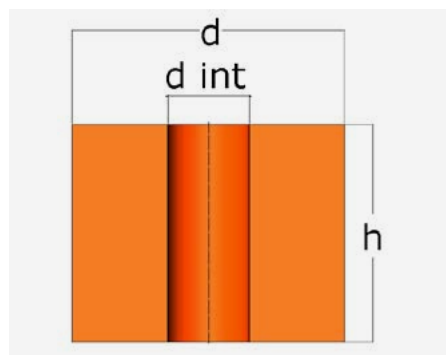

TOLÉRANCES

d, d int < 35 ± 0,25 mm

d, d int > 35 ± 0,8 %

hauteur : +10 / -5 mm

Matière	Dureté
U80	80 ShA
U100	90 ShA
U167	95 ShA
Vulkollan® 80	80 ShA
Vulkollan® 92	92 ShA

★ Quantités minimum

d	d int.	h	Prix Unitaire	★
16	6,5	12		20
		16		20
		20		20
		25		20
		32		20
20	8,5	12		20
		16		20
		20		20
		25		20
		32		20
		40		20
25	10,5	16		10
		20		10
		25		10
		32		10
		40		10
		50		10
32	13,5	16		10
		20		10
		25		10
		32		10
		40		10
		50		10
40	13,5	63		10
		80		10
		25		10
		32		10
		40		10
		50		10
50	17	63		10
		80		10
		100		10
		25		5
		32		5
		40		5
63	17	50		5
		63		5
		80		5
		100		5
		125		5
		160		5
80	21	32		5
		40		5
		50		5
		63		5
		80		5
		100		5
100	21	125		5
		160		5
		32		5
		40		5
		50		5
		63		5
125	27	80		5
		100		5
		125		5
		160		5
		32		5
		40		5
		50		5
		63		5
		80		5
		100		5
		125		5
		160		5