


Coated bearings doubles (GD)

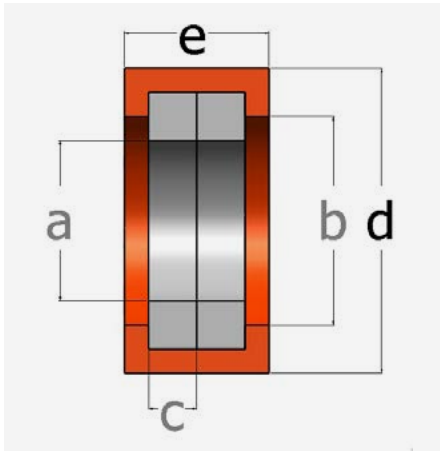

TOLERANCES

e, a : JS15

Standard hardness ratings: 90 and 95 – U series

Consult our quotations department about the option to produce fittings with a hardness ranging from 30 ShA to 99 ShA.

Bulk purchase discounts for quantities of more than 100: consult us.

Minimum manufacturing quantity per reference: 20

Réf.	Dimensions					Unit price
	Bearing			Wheel		
	a	b	c	d	e	
6000	10	26	8	40	20	
6001	12	28	8	40	20	
6002	15	32	9	45	22	
6003	17	35	10	50	24	
6004	20	42	12	55	28	
6005	25	47	12	65	28	
6006	30	55	13	75	30	
6200	10	30	9	45	22	
6201	12	32	10	45	24	
6202	15	35	11	50	23	
6203	17	40	12	55	28	
6204	20	47	14	65	32	
6205	25	52	15	70	34	
6206	30	62	16	80	36	
6300	10	35	11	50	26	
6301	12	37	12	50	28	
6302	15	42	13	55	30	
6303	17	47	14	65	32	
6304	20	52	15	70	34	
6305	25	62	17	80	38	
6306	30	72	19	90	42	

Quantity: from 20 to 100

Material	Hardness
U100	90 ShA
U167	95 ShA