


Coated bearings single (GS)

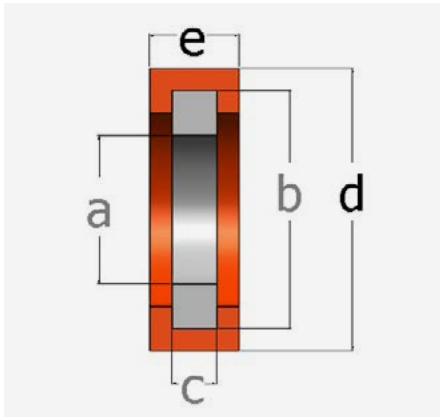

TOLERANCES

e, a : JS15

Standard hardness ratings: 90 and 95 – U series

Consult our quotations department about the option to produce fittings with a hardness rating ranging from 30 ShA to 99 ShA.

Bulk purchase discounts for quantities of more than 100: consult us.

Minimum manufacturing quantity per reference: 20

Réf.	Dimensions					Unit price
	Bearing			Wheel		
	a	b	c	d	e	
6000	10	26	8	40	10	
6001	12	28	8	40	10	
6002	15	32	9	45	11	
6003	17	35	10	50	12	
6004	20	42	12	55	14	
6005	25	47	12	65	14	
6006	30	55	13	75	15	
6200	10	30	9	45	11	
6201	12	32	10	45	12	
6202	15	35	11	50	13	
6203	17	40	12	55	14	
6204	20	47	14	65	16	
6205	25	52	15	70	17	
6206	30	62	16	80	18	
6300	10	35	11	50	13	
6301	12	37	12	50	14	
6302	15	42	13	55	15	
6303	17	47	14	65	16	
6304	20	52	15	70	17	
6305	25	62	17	80	19	
6306	30	72	19	90	21	

Quantity: from 20 to 100

Material	Hardness
U100	90 ShA
U167	95 ShA