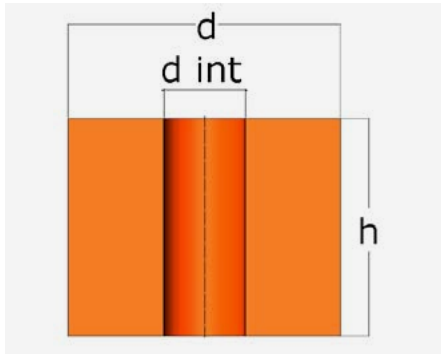


RNU UREFLEX® normalised springs (RN)

**TOLERANCES**

d, d int. < 35: ± 0,2 mm

d, d int. > 35: ± 0,6 %

height: ± 0,2 mm

| Material | Hardness |
|----------|----------|
| U80 | 80 ShA |
| U90 | 90 ShA |
| U95 | 95 ShA |

★ Minimum quantity

| d | d int. | h | Unit price | ★ |
|-----|--------|-----|------------|----|
| 16 | 6,5 | 12 | | 20 |
| | | 16 | | 20 |
| | | 20 | | 20 |
| | | 25 | | 20 |
| | | 32 | | 20 |
| 20 | 8,5 | 12 | | 20 |
| | | 16 | | 20 |
| | | 20 | | 20 |
| | | 25 | | 20 |
| | | 32 | | 20 |
| 25 | 10,5 | 40 | | 20 |
| | | 16 | | 10 |
| | | 20 | | 10 |
| | | 25 | | 10 |
| | | 32 | | 10 |
| 32 | 13,5 | 40 | | 10 |
| | | 50 | | 10 |
| | | 16 | | 10 |
| | | 20 | | 10 |
| | | 25 | | 10 |
| 40 | 13,5 | 32 | | 10 |
| | | 40 | | 10 |
| | | 50 | | 10 |
| | | 63 | | 10 |
| | | 80 | | 10 |
| 50 | 17 | 25 | | 5 |
| | | 32 | | 5 |
| | | 40 | | 5 |
| | | 50 | | 5 |
| | | 63 | | 5 |
| 63 | 17 | 80 | | 5 |
| | | 100 | | 5 |
| | | 125 | | 5 |
| | | 32 | | 5 |
| | | 40 | | 5 |
| 80 | 21 | 50 | | 5 |
| | | 63 | | 5 |
| | | 80 | | 5 |
| | | 100 | | 5 |
| | | 125 | | 5 |
| 100 | 21 | 160 | | 5 |
| | | 32 | | 5 |
| | | 40 | | 5 |
| | | 50 | | 5 |
| | | 63 | | 5 |
| 125 | 27 | 80 | | 5 |
| | | 100 | | 5 |
| | | 125 | | 5 |
| | | 160 | | 5 |
| | | 32 | | 5 |